

TSC

The Smarter Choice.

Pacific Barcode Inc.




Label Printing Solutions

sales@pacificbarcode.com • pacificbarcode.com
800.508.2535



TTP-2610MT SERIES – Industrial Thermal Transfer Bar Code Printer **MORE VALUE, MORE FEATURES, HIGHER RELIABILITY**

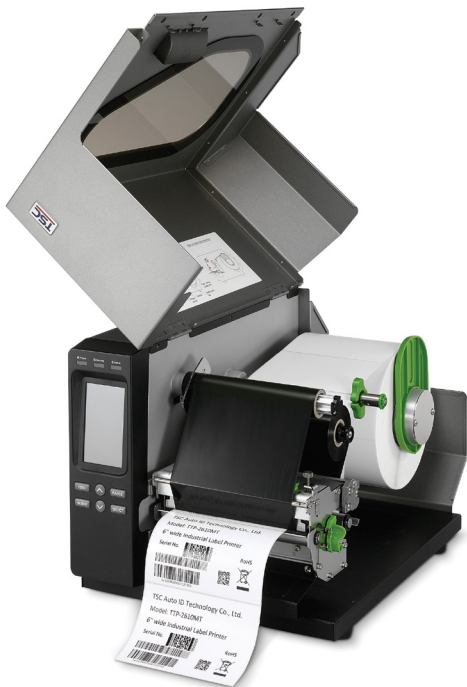

KEY FEATURES

- High quality die cast aluminum design
- "Thermal Smart Control"™ print technology produces clean, high quality barcodes
- 4.3" color LCD with 6-button menus and touch panel operation
- 203 dpi and 300 dpi models
- Ethernet, USB 2.0, USB Host, serial and parallel connectivity are standard
- 256 MB SDRAM, 512 MB Flash
- SD Flash card memory expands storage to 32 GB
- Powerful 32 bit 536 MHz RISC processor
- Auto TPH resolution switch detection
- Standard industry emulations right out of the box including Eltron® and Zebra® language support
- USB host for stand-alone or data entry at print site

APPLICATIONS

- Compliance Labeling For Shipping & Receiving
- Pallet Labeling
- Inventory Control Labeling
- Drum Labeling
- Warning Labels
- Custom Signage
- Brand Marketing Featuring Graphics, Logos & Texts
- Multiple-up Labels (two or three labels across)

TTP-2610MT SERIES – Industrial Thermal Transfer Bar Code Printer

| PRINTER MODEL | TTP-2610MT | TTP-368MT |
|---------------------------|---|------------------------------|
| Resolution | 8 dots/mm (203 DPI) | 12 dots/mm (300 DPI) |
| Printing method | Thermal Transfer & Direct Thermal | |
| Max. print speed | 305 mm (12")/second | 254 mm (10")/second |
| Max. print width | 168 mm (6.61") | 168 mm (6.61") |
| Max. print length | 14,732 mm (580") | 6,604 mm (260") |
| Enclosure | Die-cast aluminum frame/Metal cover with large clear media view window | |
| Physical dimension | 355 mm (W) x 337 mm (H) x 520 mm (D) 13.98" (W) x 13.27" (H) x 20.47" (D) | |
| Weight | 23 kg (50.71 lbs) | |
| Label roll capacity | 208.3 mm (8.2") OD | |
| Ribbon | 450 meter long, max. OD 81 mm, 1" core (Ink coated outside/inside) | |
| Ribbon width | 50.8 mm ~ 178 mm (2" ~ 7") | |
| Processor | 32-bit RISC CPU | |
| Memory | <ul style="list-style-type: none"> • 512 MB Flash memory • 256 MB SDRAM • SD Flash memory card reader for Flash memory expansion, up to 32 GB | |
| Interface | <ul style="list-style-type: none"> • RS-232 • Centronics • USB 2.0 • Internal Ethernet, 10/100 Mbps • USB host, for scanner or PC keyboard • GPIO (factory option) • Slot-in 802.11 a/b/g/n wireless (only for TTP-2610MT)(dealer option) • Bluetooth (user option) | |
| Power | Internal universal switching power supply <ul style="list-style-type: none"> • Input: AC 100-240V, 3.0A, 50-60Hz • Output: DC 24V, 8.33A, 200W | |
| LCD | 16 bits Color, 480 x 272 pixels, with back lights, Resistive Touch Screen | |
| Operation switch, button | 1 power switch, 6 buttons (Menu, Pause, Feed, Up, Down, Select) | |
| Sensors | <ul style="list-style-type: none"> • Transmissive gap sensor (position adjustable) • Black mark reflective sensor (position adjustable) • Ribbon encode & ribbon end sensor • Head open sensor | |
| Real time clock | Standard | |
| Internal fonts | <ul style="list-style-type: none"> • 8 alpha-numeric bitmap fonts • Monotype Imaging® true type font engine with one CG Triumvirate Bold Condensed scalable font | |
| Bar code | <ul style="list-style-type: none"> • 1D bar code Code 39, Code 93, Code 128UCC, Code 128 subsets A,B,C, Codabar, Interleave 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11 • 2D bar code PDF-417, Maxicode, DataMatrix, QR code, Aztec | |
| Font and barcode rotation | 0, 90, 180, 270 degree | |
| Printer language | TSPL-EZ™ (Compatible to EPL, ZPL, ZPL II) | |
| Media type | Continuous, die-cut, fan-fold, tag, notched, black mark (outside wound) | |
| Media width | 50.8 ~ 172.7 mm (2" ~ 6.8") | |
| Media thickness | 0.06 ~ 0.254 mm (2.36 ~ 10 mil) | |
| Media core diameter | 76.2 mm (3") | |
| Label length | 10 ~ 14,732 mm (0.39" ~ 580") | 10 ~ 6,604 mm (0.39" ~ 260") |
| Environment condition | Operation: 5 ~ 40°C, 25 ~ 85% non-condensing Storage: -40 ~ 60°C, 10 ~ 90% non-condensing | |
| Safety regulation | FCC Class A, CE Class A, CCC | |
| Environmental concern | Comply with RoHS, WEEE | |
| Accessories | <ul style="list-style-type: none"> • Windows labeling software CD disk • Quick start guide • USB cable • Power cord • Ribbon paper core | |
| Limited warranty | <ul style="list-style-type: none"> • Printer: 2 years • Print head: 25 km (1 million inches) or 12 months which comes first • Platen: 50 km (2 million inches) or 12 months which comes first | |
| Factory options | <ul style="list-style-type: none"> • GPIO interface | |
| Dealer options | <ul style="list-style-type: none"> • Peel-off kit (include internal rewind & peel off module) • Heavy duty cutter (full cut) • 802.11 a/b/g/n wireless module (slot-in)(only for TTP-2610MT) | |
| User options | <ul style="list-style-type: none"> • Bluetooth module (serial interface) • KP-200 Plus keyboard display unit • KU-007 Plus programmable smart keyboard | |



TSC
The Smarter Choice.

Pacific Barcode Inc.
Label Printing Solutions
sales@pacificbarcode.com · pacificbarcode.com
800.508.2535

TSC® is a trademark of TSC Auto ID Technology Co., Ltd.
TSC Auto ID Technology Co., Ltd. is an ISO 9001/14001 registered company.
© 2017 TSC Auto ID Technology Co., Ltd.
Product models and Specifications are subject to change without notice.
Contact your TSC sales representative for specific information.