



Mobile Printers

MX20

With MX series on hand, label printing becomes so simple between your fingertips.

MX series is powered by high capacity lithium-ion battery, armored with water/dust/shock resistant feature, supported with drop-and-fit design; it is your ultimate weapon to take on the challenges from mobile applications in retail / warehouse & storage / parking receipt industry and many more.



- Drop & Fit label installation design.
- Long standby time up to 72 hours or 300 label cycles between charges.
- IP54 water / dust resistant and 1.5M shock resistant.
- Supports both wire (RS232 and USB ports)

GoDEX

MX20 Printer Specification

Model	MX20
Print Method	Direct Thermal
Resolution	203 dpi (8 dots/mm)
Print Speed	Up to 4 IPS (101.6 mm/s)
Print Width	1.89" (48 mm)
Print Length	45" (~1142 mm)
Processor	32 Bit RISC CPU
Memory	128 MB Flash (60 MB for user storage) ; 32 MB SDRAM
Sensor Type	Gap sensor , Fixed transmissive sensor , Fixed reflective sensor
Media	<p>Types : Direct Thermal receipt, anti-UV receipt, gap label, center alignment Inter-label gap size from 2 mm to 4 mm. 3 mm preferred</p> <p>Width : 2.28" (59 mm) fixed</p> <p>Thickness : Min 0.0508 mm, Max 0.165 mm</p> <p>Media roll Diameter : Max. 1.57" (40 mm)</p>
Printer Language	GPOS Emulations or EZPL / GZPL / GEPL / GDPL Emulations
Software	<p>Label design software: GoLabel (for EZPL only), GoApp (Android), GoApp (iOS)</p> <p>Driver: Vista, Windows 7, Windows 8 & 8.1, Windows 10, Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019, MAC, Linux</p> <p>SDK: Win CE, .NET, Windows Vista, Windows 7, Windows 8 & 8.1, Windows 10, Android, Mac, iOS</p>
Resident Fonts	<p>Bitmap fonts: 6, 8, 10, 12, 14, 18, 24, 30, 16X26 and OCR A & B</p> <p>Bitmap fonts 0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable</p> <p>Bitmap fonts 8 times expandable in horizontal and vertical directions</p> <p>TTF Fonts: TTF Fonts (Bold / Italic / Underline) . 0°, 90°, 180°, 270° rotatable</p> <p>Bitmap fonts: 0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable</p>
Download Fonts	<p>Asian fonts: 16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese (GB2312), Japanese (S-JIS), Korean (KS-X1001)</p> <p>0°, 90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions</p> <p>TTF fonts: TTF Fonts (Bold / Italic / Underline) . 0°, 90°, 180°, 270° rotatable</p>
Barcodes	<p>1-D Bar codes:</p> <p>China Postal Code, Codabar, Code 11, Code 32, Code 93, Code 128 (subset A, B, C), EAN-8/EAN-13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5, Interleaved 2-of-5 (1 of 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBN-128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Standard 2 of 5, Telepen, Matrix 2 of 5, UPC-A/UPC-E (with 2 or 5 digit extension), UCC/EAN-128 K-Mart and Random Weight</p> <p>2-D Bar codes:</p> <p>Aztec code, Code 49, Codablock F, Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417, QR code, TLC 39, GS1 Composite</p>
Code Pages	<p>Codepage 437, 737, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869</p> <p>Windows 1250, 1251, 1252, 1253, 1254, 1255, 1257</p> <p>Unicode UTF8 & UTF16BE & UTF16LE</p>
Graphics	Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software
Interfaces	RS232 + USB 2.0 port, mini-B type connector BT 2.1 + EDR
RTC	N/A
Control Panel	4 dual color LEDs for Power, Battery, Communication, Error status indication. 3 buttons for Power, Feed and BT functions
Power	Switching power supply, I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.2 A
Battery	Rechargeable DC 7.4 V Lithium-ion battery, 1150 mAh or higher capacitance
Environment	<p>Operation Temperature 14 °F to 122 °F (-10°C to 50°C)</p> <p>Storage Temperature -4 °F to 140 °F (-20°C to 60°C)</p>
Humidity	<p>Operation 10 – 90 %, non - condensing.</p> <p>Storage 10 – 90 %, non - condensing.</p>
IP Rating	Intrusion Protection, IP42 requirement for case design, IP54 for protective case
Drop Level	1.5 meter height
Agency Approvals	CE EMC, FCC part 15B class B, FCC Part 15CCCC, SRRC, NCC, CB, UL, cUL, UKCA
Dimension	<p>Height 2.0" (51 mm)</p> <p>Width 3.3" (84 mm)</p> <p>Length 5.1" (129.55 mm)</p>
Weight	<p>0.72 lbs (325 g), with battery</p> <p>Switching power supply</p> <p>USB cable</p>
Options	<p>RS-232 cable</p> <p>Li-ion battery</p> <p>4-bay battery charger station</p> <p>Protective case</p>

*Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

**Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height, and maximum print speed capability.

Applications

Applications for Labels & Barcodes

MX20 series is your best friend for getting the job done instantly.



Warehouses, Logistic & Transportation

Cross Docking, inventory management, receiving / shipping, work - in - process tracking, or related industrial applications.

Retail


Content labels, receipts for registered mails, invoices & receipts, postage labels, etc.

Parking Management

Parking receipt, parking ticket, and so on.



High quality original GODEX thermal transfer ribbons

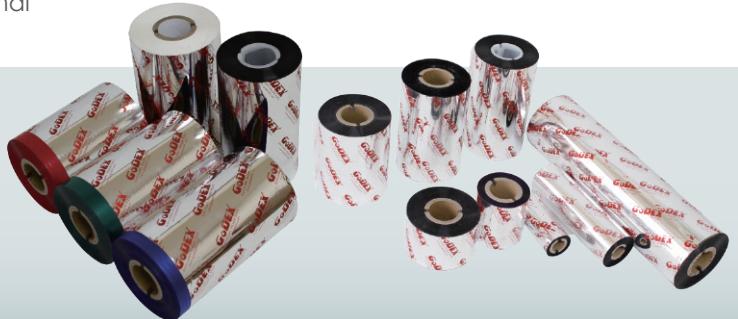

GODEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax/ Resin
- Resin
- Near Edge




LABEL DESIGN SOFTWARE

GoLabel Software /
User Friendly

GoLabel II is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel II is the first-choice label design software that you can't miss!

Go visit www.godexintl.com and download GoLabel II to experience it!

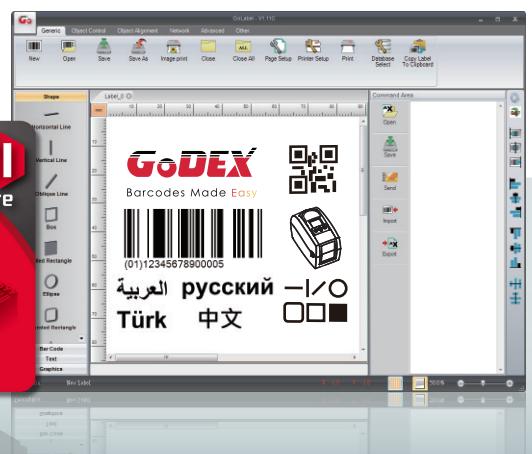

Godex International
(Headquarters)
Telephone : +886 2 2225 8580
Contact us : infoGT@godexintl.com

Godex Americas
Telephone : +1 805 987 5100
Contact us : infoGA@godexintl.com

Godex China
Telephone : +86 21 56651313
Contact us : infoGC@godexintl.com

Godex Europe
Telephone : +49 2195 59599 0
Contact us : infoGE@godexintl.com